



## 产品技术说明书

Epolin, Inc.  
358-364 Adams Street  
Newark, NJ 07105 USA  
Tel: (888) 782-3530  
Fax: (973) 465- 5353  
E-mail: [epolin@epolin.com](mailto:epolin@epolin.com)  
Web: [www.epolin.com](http://www.epolin.com)

## Epilight™ 5262 可见光染料


### 性能和用途

本品为窄带吸收体  
本品具有较高的吸收率  
本品在溶液中呈深蓝色  
本品在喷射模塑条件下性质稳定

### 理化性质

最大吸收波长,  $\lambda_{\max}$ : 634 纳米  
在丙酮中的吸收率:  $170 \text{ L g}^{-1} \text{ cm}^{-1}$   
外观: 蓝色粉末  
熔点:  $154\text{--}160^\circ\text{C}$   
溶解度 (克) /100 克溶剂:  
    甲基乙基酮 28.5 克  
    二甲苯 0.07 克  
    环己酮 21.0 克

Epilight™ 5262 在丙酮中的标准化吸收光谱

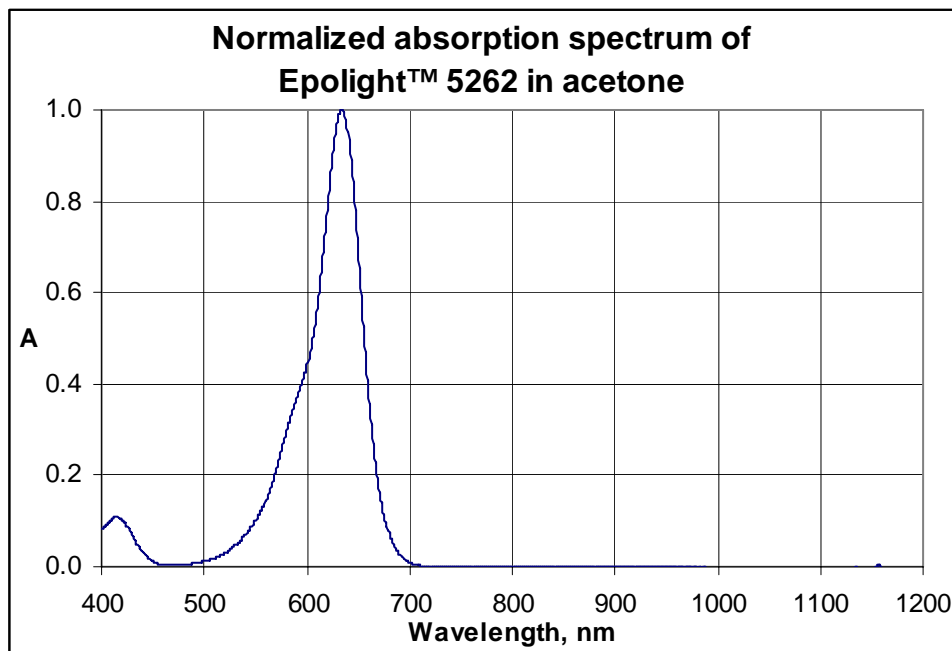

波长, 纳米

Although the information in this data sheet is presented in good faith and believed to be correct, Epolin, Inc. makes no representations or warranties as to the completeness or accuracy of the information which is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will Epolin, Inc. be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this data sheet or the products to which the information refers.